
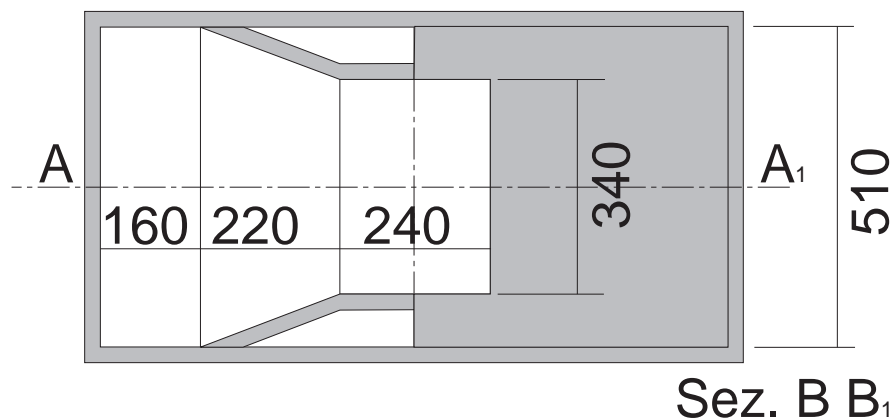


BT01 LOW FREQUENCY HORN BOX

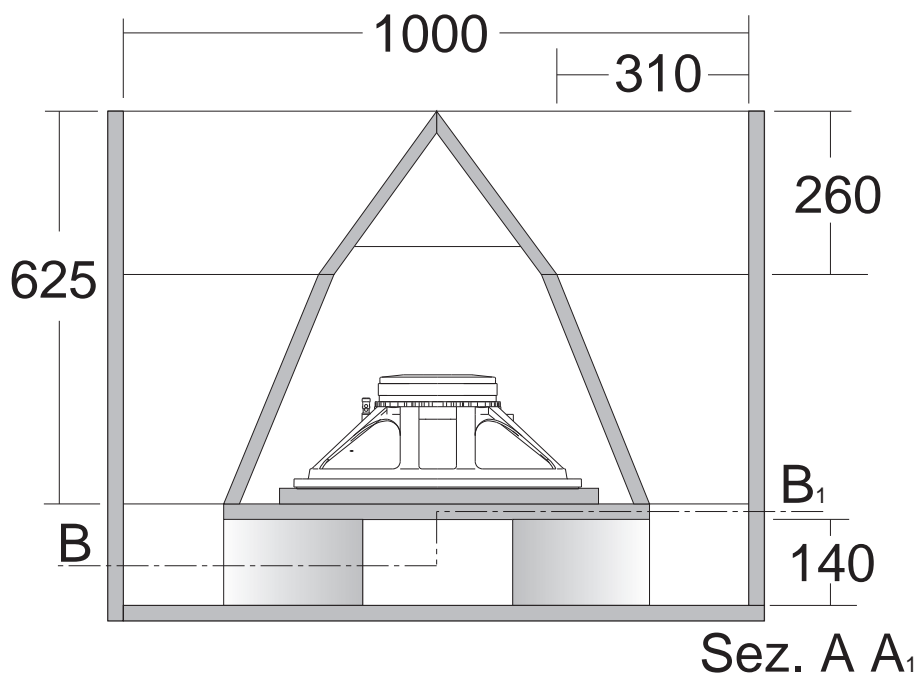

COMPONENTS		
L F	18.75 W	18.00 W3
Max Power	800 W	1000 W
Nominal Power	400 W	500 W
Impedance	8 Ω	

SPECIFICATIONS

Solid angle radiation	:	$\pi/2$	sterad
Horn cut off frequency	:	48	Hz
Sensitivity 1W/1m	:	105	dB
Frequency range	:	20 ÷ 200	Hz

FREQUENCY RESPONSE (1W/1m)

